


FLUOR-O-FLO®
Virgin PTFE Check Valve

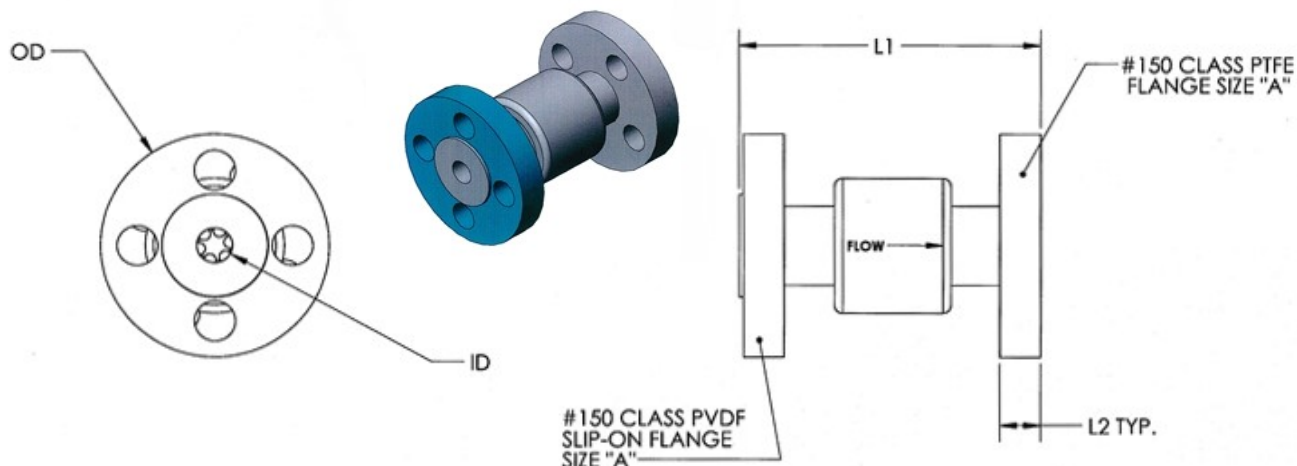

Product Specifications 3..2-2

Nominal Size (inches)	Part No.	L1 (inches)	L2 (inches)	ID (inches)	OD (inches)	Cracking Pressure (PSI)
1/2"	FV-CV04	4.64	5/8	0.56	3-1/2	2-6
1"	FV-CV08	5.39	5/8	0.96	4-1/4	2-6

- Valves are currently available in 1/2" and 1"
- Standard connections are Flanged; custom connections including Female NPT, Male NPT, Tri-Clamp and Hose-Barb available on special order
- Valves are full-port with the through orifice equal to the area of schedule 80 pipe
- Service temperatures – ambient to 300°F
- Wetted parts are made from Micromold’s MICROFLON™ virgin PTFE providing superior resistance to creep
- Valves are individually tested in accordance with MSS-SP-82 -1992-BW

Also available:
FLUOR-O-FLO® PTFE Check Valve

- Sales Bulletin